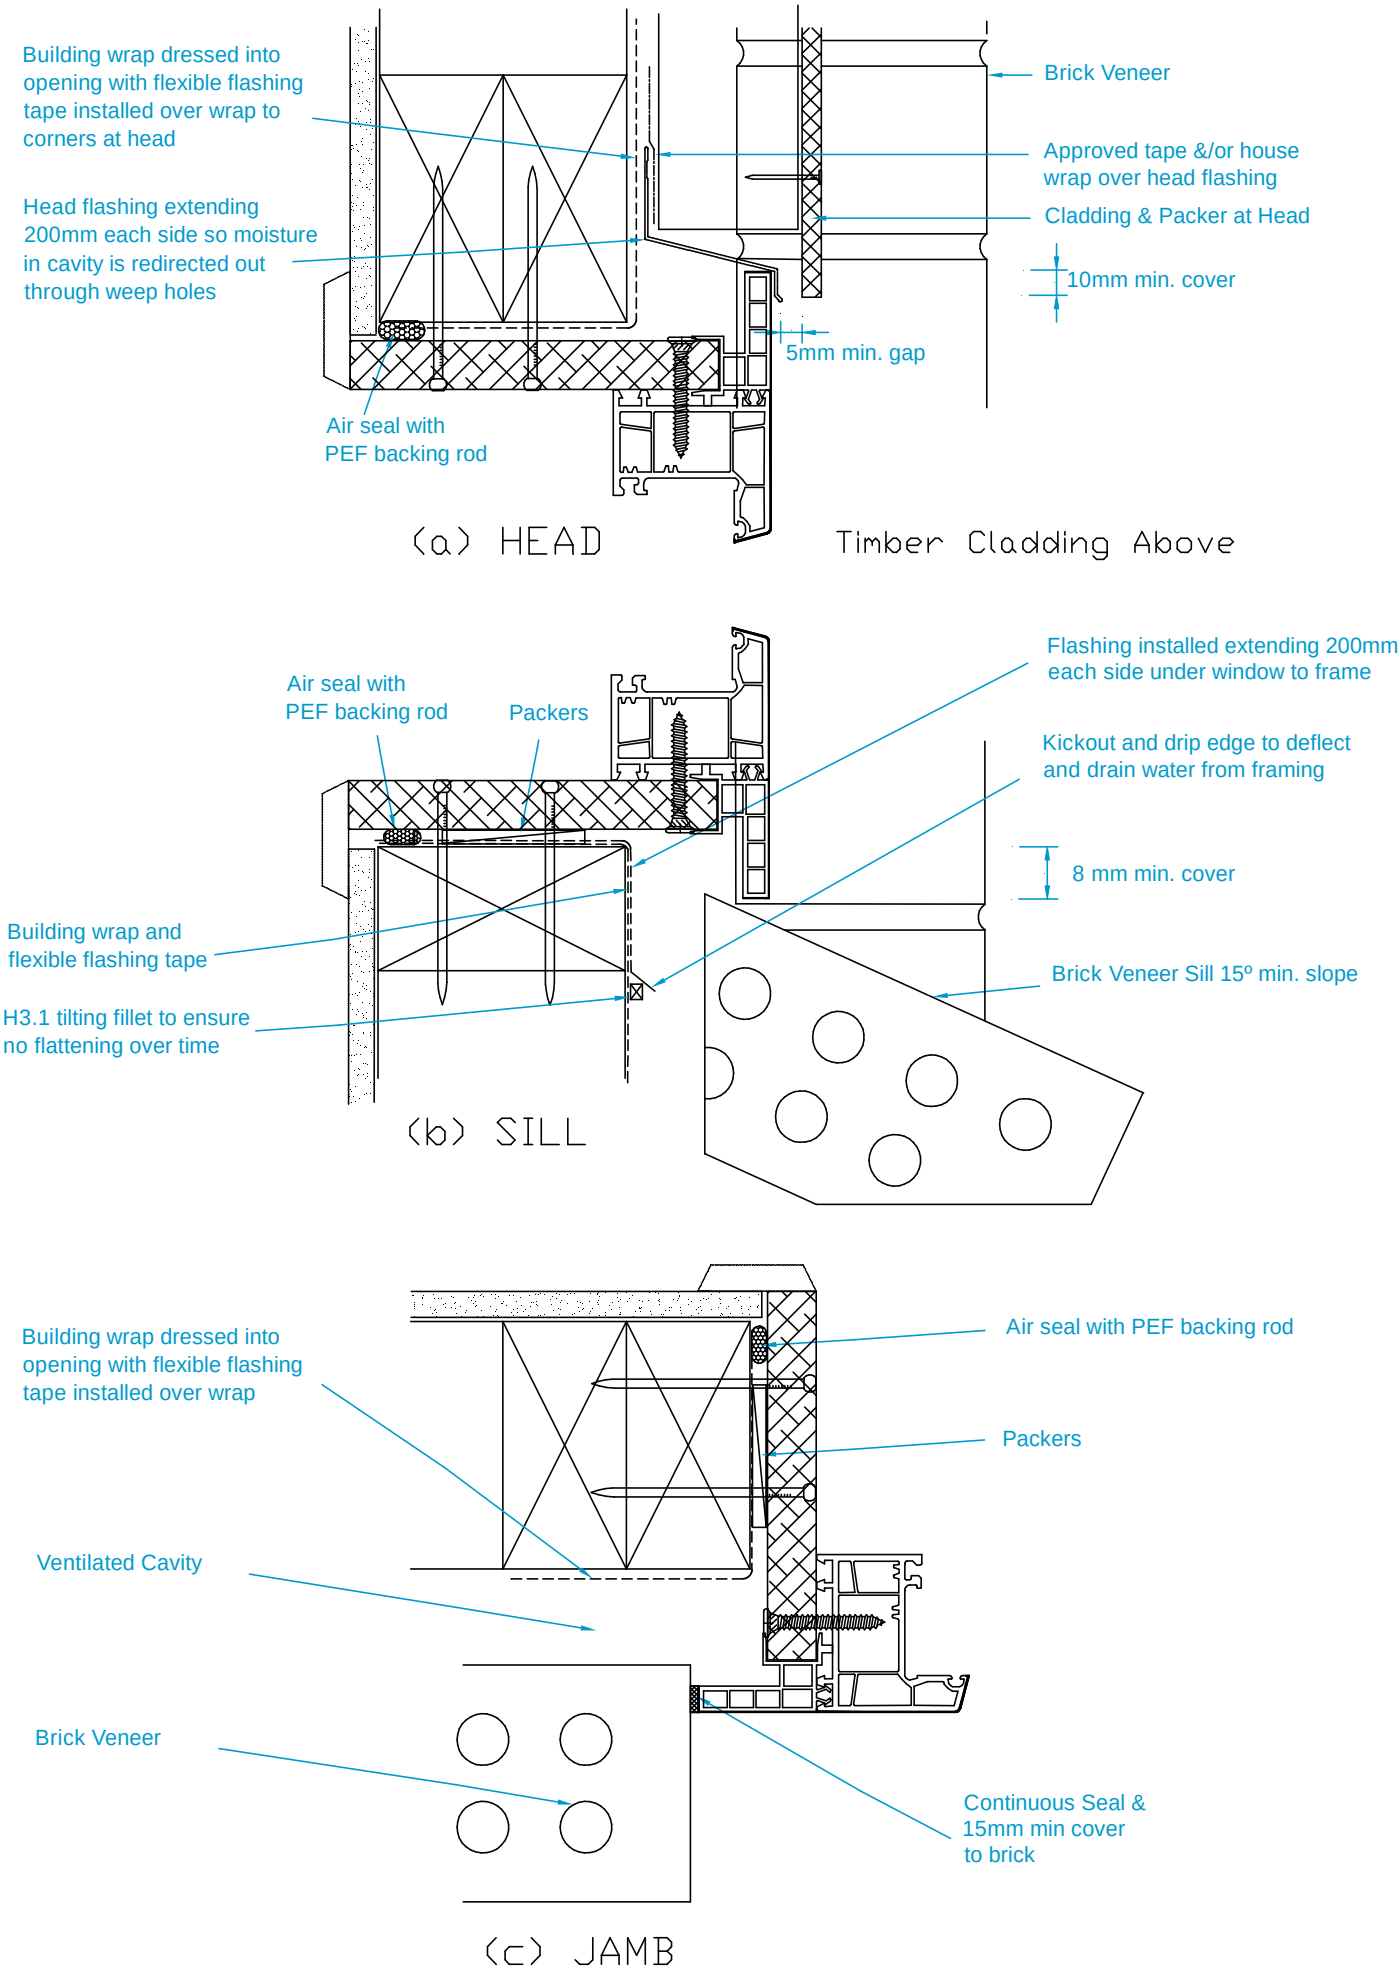
Building wrap dressed into opening with flexible flashing tape installed over wrap to corners at head
Head flashing extending 200mm each side so moisture in cavity is redirected out through weep holes
Air seal with PEF backing rod
Brick Veneer
Approved tape &/or house wrap over head flashing
Cladding & Packer at Head
10mm min. cover
5mm min. gap
(a) HEAD
Timber Cladding Above
Air seal with PEF backing rod
Packers
Flashing installed extending 200mm each side under window to frame
Kickout and drip edge to deflect and drain water from framing
8 mm min. cover
Building wrap and flexible flashing tape
H3.1 tilting fillet to ensure no flattening over time
Brick Veneer Sill 15º min. slope
(b) SILL
Building wrap dressed into opening with flexible flashing tape installed over wrap
Air seal with PEF backing rod
Packers
Ventilated Cavity
Brick Veneer
Continuous Seal & 15mm min cover to brick
(c) JAMB