


Rebate Table 5.1.2

Floor Type	Thickness (mm)	Rebate Height H (mm)	Rebate Width W (mm) (from back of the flange)
Carpet	20	45	55
Tile	13	52	55
Timber	22	43	55

**Note:** Rebate width is calculated from the back of the flange. For cavity construction, that is the outside of cladding. For direct fix, that is Min 5mm out of cladding.

**Note:** The aluminium angle shall be fixed to bottom frame onsite with packer underneath after checking the rebate height.

**Note:** The bottom frame needs to be packed level from end to end so weight is well supported by the structure.

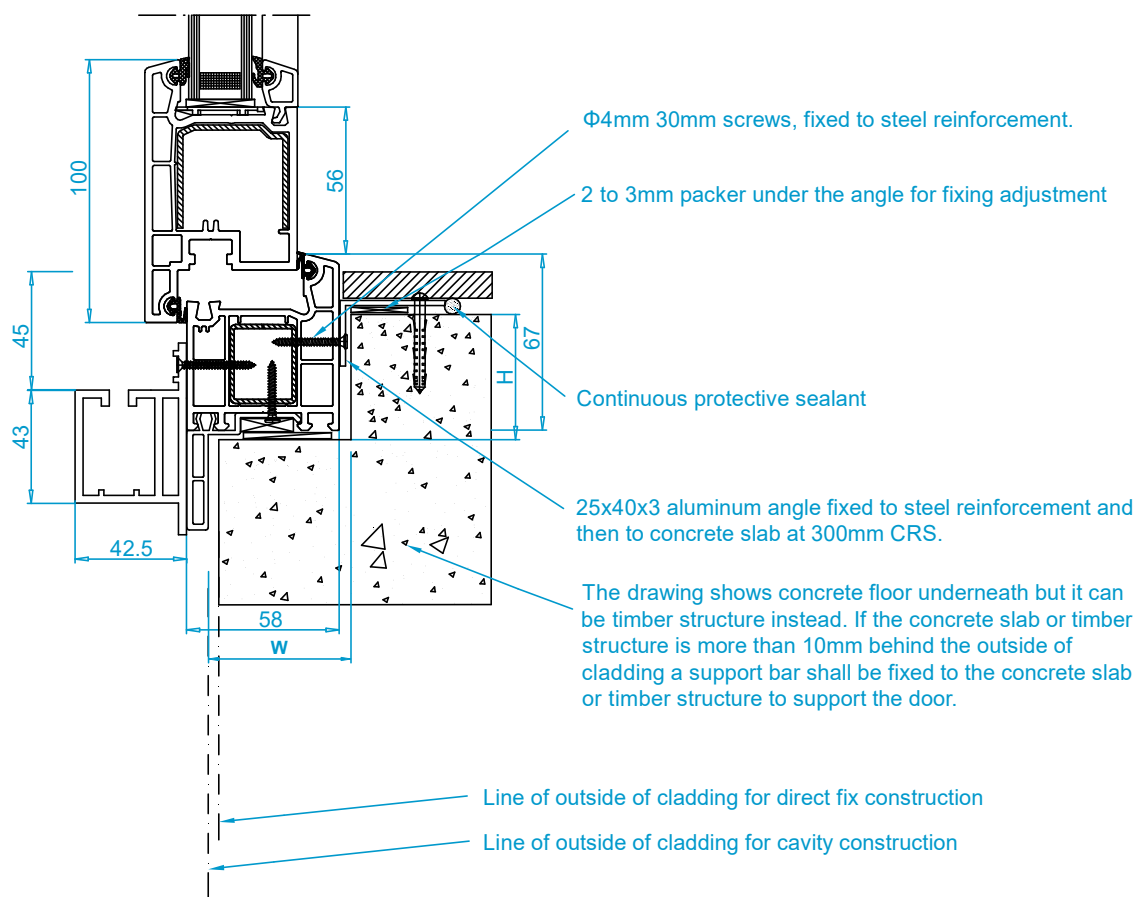

Outward Opening